


**HAWKE 501/421 TYPE
CABLE GLAND**
EExd IIC Eexe II
Increased Safety, Flameproof
Zones 1 & 2, 21 & 22

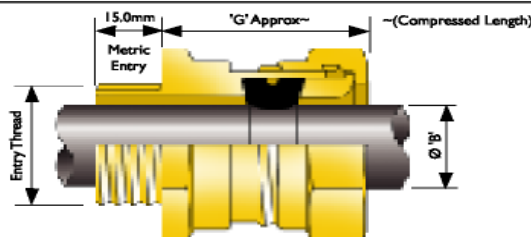

CABLE GLAND SELECTION TABLE										
Size Ref.	Entry Thread Size		Cable Acceptance Details				'G'	Hexagon Dimensions		
			Outer Sheath 'B'		Standard Seal	Alternative Seal (S)		Across Flats	Across Corners	
	Metric	NPT* Std./Option	Min.	Max.						Min.
			2K	M16	-	3.0		8.0	-	-
Os	M20 ²	½"	3.0	8.0	-	-	32.8	24.0	27.7	
O	M20 ²	½"	7.5	11.9	-	-	32.8	24.0	27.7	
A	M20	¾"/½"	11.0	14.3	8.5	13.4	32.8	30.0	34.6	
B	M25	1"/¾"	13.0	20.2	9.5	15.4	33.8	36.0	41.6	
C	M32	1¼"/1"	19.0	26.5	15.5	21.2	35.2	46.0	53.1	
C2	M40	1½"/1¼"	25.0	32.5	22.0	28.0	36.5	55.0	63.5	
D	M50	2"/1½"	31.5	44.4/42.3 ¹	27.5	34.8	47.9	65.0	75.1	
E	M63	2½"/2"	42.5	56.3/54.3 ¹	39.0	46.5	46.2	80.0	92.4	
F	M75	3"/2½"	54.5	68.2/65.3 ¹	48.5	58.3	48	95.0	109.6	
G	M80	3½"	67.0	73.0	-	-	41	106.4	123.0	
H	M90	3½"	67.0	77.6	-	-	41	115.0	132.8	
J	M100	4"	75.0	91.6	-	-	41	127.0	146.7	

¹ Smaller value is applicable when selecting reduced NPT entry option.
² Sizes Os and O are available with an M16 thread size. For O size with M16 thread, the maximum cable outer sheath diameter is 10.9mm.

General Information

All Metric entry threads are 1.5mm pitch medium fit.
All dimensions in millimetres (except* where dimensions are in inches).
Assembly instruction data sheet No. A.I. 307. For sizes Os to J.

Accessories including locknuts, sealing washers, serrated washers, earth tags, shrouds, adaptors and reducers available. See pages 44 - 48.

Materials & Finishes

The 501/421 cable gland is manufactured as standard in brass, stainless steel and aluminium.
NPT entries, nickel plated as standard. Full nickel plating available.


Cable Gland Ordering Examples

Cable Gland Type/Size/Thread

e.g. 501/421/C/M32
501/421/C/1¼" NPT

Cable Gland with Alternative Seal (S)

e.g. 501/421/C/M32/S
501/421/C/1¼" NPT/S

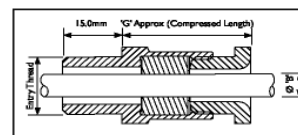

2K Size Cable Gland Design









Application

- Outdoor or Indoor use.
- For use with non-armoured elastomer and plastic insulated cables.
- See technical section of the catalogue for installation rules and regulations.

Features

- Provides a cable retention seal onto the cables outer sheath.
- When used in increased safety applications, this cable gland may be used with braided cable where the braid and the cables outer sheath pass into the enclosure.
The braid must be suitably terminated inside the enclosure.

Technical Data

- Flameproof EExd and Increased Safety EExe.  II 2 GD
- Baseefa Certificate No. BAS 01 ATEX 2070X. For Os - F.
- Baseefa Certificate No. BAS 01 ATEX 2294X. For G - J.
- Suitable for use in Zone 1, Zone 2, Zone 21 and Zone 22.
- Suitable for use in Gas Groups IIA, IIB and IIC.
- Construction and test standards EN 50014, EN 50018, EN 50019 and EN 50281-1-1.
IEC 60079-0, IEC 60079-1 and IEC 60079-7.
- IP66, IP67 and IP68 (30 metres for 7 days) ingress protection to IEC 60529, EN 60529 and NEMA 4X.
- DTS01 deluge protection certified by ITS.
- Operating temperature range -60°C to +100°C as standard.
- Alternative Certification Options Available.
 -   Exd IIC/Exe II.
 -   BR-Exd IIC/Exe II.
 -   GOST R-Exd IICU/Exe IIU.
 -  AUS-Exd IIC/Exe II.

Supplied by:

A.S.P. Electro-Technology Ltd
Specialist Suppliers of Hazardous Area Certified
Electrical Products & Instrumentation

39 London Road, Hinckley, LE10 1HQ. U.K.
Tel: +44 (0)1455 635796 Fax: +44 (0)1455 251110
Email: sales@asp-electro-tech.com Web: www.asp-electro-tech.com



This publication is not intended to form the basis of a contract. All the above specifications, dimensions, weights, tolerances etc are typical and may be varied or changed by the manufacturer without prior notice. A.S.P. Electro-Technology accept no liability for consequence of use.

