


HAWKE 501/453 RAC TYPE CABLE GLAND

EExd IIC Eexe II
Increased Safety, Flameproof
Zones 1 & 2, 21 & 22

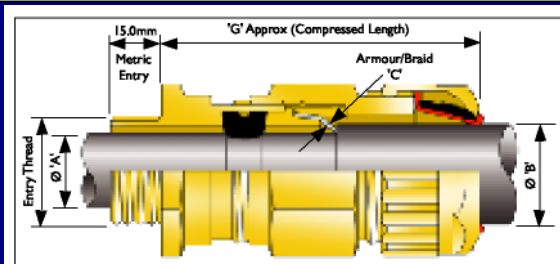

CABLE GLAND SELECTION TABLE

Size Ref.	Entry Thread Size		Cable Acceptance Details								Hexagon Dimensions		
			Inner Sheath 'A'		Outer Sheath 'B'		'C' Armour/Braid		'G'				
	Metric	NPT* Std./Option	Standard Seal Min.	Alternative Seal (S) Max.	Min.	Max.	Orientation 1	Orientation 2		Across Flats	Across Corners		
Os	M20 ²	½"	3.0	8.0	-	-	5.5	12.0	0.9/1.25	0/0.7	65.1	24.0	27.7
O	M20 ²	½"	7.5	11.9	-	-	9.5	16.0	0.9/1.25	0/0.7	65.1	24.0	27.7
A	M20	¾"/1½"	11.0	14.3	8.5	13.4	12.5	20.5	0.9/1.25	0/0.7	66.1	30.0	34.6
B	M25	1"/¾"	13.0	20.2	9.5	15.4	16.9	26.0	1.25/1.6	0/0.7	71.4	36.0	41.6
C	M32	1¼"/1"	19.0	26.5	15.5	21.2	22.0	33.0	1.6/2.0	0/0.7	75.2	46.0	53.1
C2	M40	1½"/1¼"	25.0	32.5	22.0	28.0	28.0	41.0	1.6/2.0	0/0.7	77.1	55.0	63.5
D	M50	2"/1½"	31.5	44.4/42.3	27.5	34.8	36.0	52.6	1.8/2.5	0/1.0	90.3	65.0	75.1
E	M63	2½"/2"	42.5	56.3/54.3	39.0	46.5	46.0	65.3	1.8/2.5	0/1.0	96.7	80.0	92.4
F	M75	3"/2½"	54.5	68.2/65.3	48.5	58.3	57.0	78.0	1.8/2.5	0/1.0	96	95.0	109.6

Larger cable glands available in 501/453 design. See page 23.

G	M80	3½"	67.0	73.0	-	-	75.0	89.5	#	#	95.6	106.4	123.0
H	M90	3½"	67.0	77.6	-	-	75.0	89.5	#	#	95.6	115.0	132.8
J	M100	4"	75.0	91.6	-	-	88.0	104.5	#	#	95.6	127.0	146.7

¹ Smaller value is applicable when selecting reduced NPT entry option.

² Sizes Os and O are available with an M16 thread size. For O size with M16 thread, the maximum cable inner sheath diameter is 10.9mm.

General Information

All Metric entry threads are 1.5mm pitch medium fit.

All dimensions in millimetres (except* where dimensions are in inches).

Dedicated armour clamping rings are fitted. Please specify armour type and size.

Assembly instruction data sheet No. A.I. 302.

For sizes Os to F.

Assembly instruction data sheet No. A.I. 329.

For sizes G to J.

Accessories including locknuts, sealing washers, serrated washers, earth tags, shrouds, adaptors and reducers available. See pages 44 - 48.

Materials & Finishes

The 501/453/RAC cable gland is manufactured as standard in brass, stainless steel and aluminium. NPT entries, nickel plated as standard. Full nickel plating available.

Cable Gland Ordering Examples

Cable Gland Type/Size/Thread

e.g. 501/453/RAC/C/M32
501/453/RAC/C/1¼" NPT

Cable Gland with Alternative Seal (S)

e.g. 501/453/RAC/C/M32/S
501/453/RAC/C/1¼" NPT/S

Alternative Reversible Armour Clamping Rings (RAC)

Size Ref.	Steel Wire Armour/Braid/Tape	
	Orientation 1	Orientation 2
O/Os	0.8 - 1.0□	0.4 - 0.8
A	0.8 - 1.0□	0.4 - 0.8
B	0.9 - 1.25□	0.5 - 0.9
C	1.2 - 1.6□	0.6 - 1.2
C2	1.2 - 1.6□	0.6 - 1.2
D	1.45 - 1.8□	1.0 - 1.45□
E	1.45 - 1.8□	1.0 - 1.45□
F	1.45 - 1.8□	1.0 - 1.45□

Cable Gland with Alternative Clamping Ring (AR)

e.g. 501/453/RAC/C/M32/AR
501/453/RAC/C/1¼" NPT/AR

Application

- Outdoor or Indoor use.
- For use with single wire armoured 'W', wire braided 'X' and steel tape armoured 'Z', elastomer and plastic insulated cables.
- See technical section of catalogue for installation rules and regulations.

Features

- Provides armour clamping using one clamping arrangement for all armour/ braid types.
- Provides a seal on the cables inner sheath.
- Deluge protection option available.
- Provides a cable retention and low smoke and fume, zero halogen seal onto the cables outer sheath.

Technical Data

- Flameproof EExd and Increased Safety EExe. II 2 GD
- Baseefa Certificate No. BAS 01 ATEX 2072X. For Os - F.
- Baseefa Certificate No. BAS 01 ATEX 2296X. For G - J. □
- Suitable for use in Zone 1, Zone 2, Zone 21 and Zone 22.
- Suitable for use in Gas Groups IIA, IIB and IIC.
- Construction and test standards EN 50014, EN 50018, EN 50019 and EN 50281-1-1. IEC 60079-0, IEC 60079-1 and IEC 60079-7.
- IP66, IP67 and IP68 (30 metres for 7 days) ingress protection to IEC 60529, EN 60529 and NEMA 4X.
- DTS01 deluge protection certified by ITS.
- Operating temperature range -60°C to +80°C as standard.
- Alternative Certification Options Available
 - Exd IIC/Exe II.
 - CEPEL BR-Exd IIC/Exe II.
 - GOST R-Exd IICU/Exe IIU.
 - AUS-Exd IIC/Exe II.

Supplied by:

A.S.P. Electro-Technology Ltd
Specialist Suppliers of Hazardous Area Certified
Electrical Products & Instrumentation

39 London Road, Hinckley, LE10 1HQ. U.K.
Tel: +44 (0)1455 635796 Fax: +44 (0)1455 251110
Email: sales@asp-electro-tech.com Web: www.asp-electro-tech.com



This publication is not intended to form the basis of a contract. All the above specifications, dimensions, weights, tolerances etc are typical and may be varied or changed by the manufacturer without prior notice. A.S.P. Electro-Technology accept no liability for consequence of use.