


# HAWKE 501/423 CABLE GLAND

EExd IIC EExe II  
Increased Safety, Flameproof  
Zones 1 & 2, 21 & 22

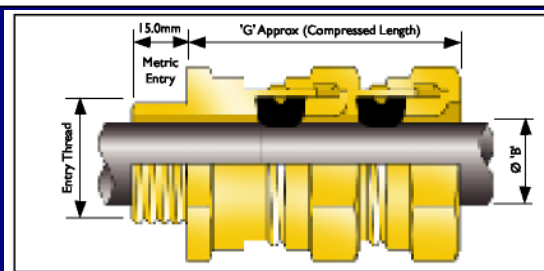

## CABLE GLAND SELECTION TABLE

Size Ref.	Entry Thread Size		Cable Acceptance Details				'G'	Hexagon Dimensions	
			Outer Sheath 'B'		Across Flats	Across Corners			
	Metric	NPT* Std/Option	Standard Seal					Alternative Seal (S)	
Min.			Max.	Min.	Max.				
Os	M20 <sup>2</sup>	1/2"	3.0	8.0	-	-	52.3	24.0	27.7
O	M20 <sup>2</sup>	1/2"	7.5	11.9	-	-	52.3	24.0	27.7
A	M20	3/4"/1/2"	11.0	14.3	8.5	13.4	51.5	30.0	34.6
B	M25	1"/3/4"	13.0	20.2	9.5	15.4	54.7	36.0	41.6
C	M32	1 1/4"/1"	19.0	26.5	15.5	21.2	55.9	46.0	53.1
C2	M40	1 1/2"/1 1/4"	25.0	32.5	22.0	28.0	58.1	55.0	63.5
D	M50	2"/1 1/2"	31.5	44.4/42.3 <sup>1</sup>	27.5	34.8	74.3	65.0	75.1
E	M63	2 1/2"/2"	42.5	56.3/54.3 <sup>1</sup>	39.0	46.5	73.2	80.0	92.4
F	M75	3"/2 1/2"	54.5	68.2/65.3 <sup>1</sup>	48.5	58.3	75	95.0	109.6
G	M80	3 1/2"	67.0	73.0	-	-	68	106.4	123.0
H	M90	3 1/2"	67.0	77.6	-	-	68	115.0	132.8
J	M100	4"	75.0	91.6	-	-	68	127.0	146.7

<sup>1</sup> Smaller value is applicable when selecting reduced NPT entry option.

<sup>2</sup> Sizes Os and O are available with an M16 thread size. For O size with M16 thread, the maximum cable outer sheath diameter is 10.9mm.

### General Information

All Metric entry threads are 1.5mm pitch medium fit.  
All dimensions in millimetres (except\* where dimensions are in inches).  
Assembly instruction data sheet No. A.I. 306. For sizes Os to J.

Accessories including locknuts, sealing washers, serrated washers, earth tags, shrouds, adaptors and reducers available. See pages 44 - 48.

### Materials & Finishes

The 501/423 cable gland is manufactured as standard in brass, stainless steel and aluminium.  
NPT entries, nickel plated as standard. Full nickel plating available.

### Cable Gland Ordering Examples

Cable Gland Type/Size/Thread

e.g. 501/423/C/M32  
501/423/C/1 1/4" NPT

### Cable Gland with Alternative Seal (S)

e.g. 501/423/C/M32/S  
501/423/C/1 1/4" NPT/S








### Application

- Outdoor or Indoor use.
- For use with non-armoured elastomer and plastic insulated cables.
- May be used on cables incorporating inner and outer cable sheaths.
- See technical section of catalogue for installation rules and regulations.

### Features

- Provides a cable retention seal onto the cables outer sheath at two independent sealing points.
- When used in increased safety applications, this cable gland may be used with braided cable where the braid and the cables outer sheath pass into the enclosure. The braid must be suitably terminated inside the enclosure.

### Technical Data

- Flameproof EExd and Increased Safety EExe.  II 2 GD
- Baseefa Certificate No. BAS 01 ATEX 2071X. For Os - F.
- Baseefa Certificate No. BAS 01 ATEX 2295X. For G - J. 
- Suitable for use in Zone 1, Zone 2, Zone 21 and Zone 22.
- Suitable for use in Gas Groups IIA, IIB and IIC.
- Construction and test standards EN 50014, EN 50018, EN 50019 and EN 50281-1-1. IEC 60079-0, IEC 60079-1 and IEC 60079-7.
- IP66, IP67 and IP68 (30 metres for 7 days) ingress protection to IEC 60529, EN 60529 and NEMA 4X.
- DTS01 deluge protection certified by ITS. Additional deluge protection seal also available.
- Operating temperature range -60°C to +100°C as standard.
- Alternative Certification Options Available.
  -   Exd IIC/Exe II.
  -   BR-Exd IIC/Exe II.
  -  AUS-Exd IIC/Exe II.

## Supplied by:

**A.S.P. Electro-Technology Ltd**  
Specialist Suppliers of Hazardous Area Certified  
Electrical Products & Instrumentation

39 London Road, Hinckley, LE10 1HQ. U.K.  
Tel: +44 (0)1455 635796 Fax: +44 (0)1455 251110  
Email: [sales@asp-electro-tech.com](mailto:sales@asp-electro-tech.com) Web: [www.asp-electro-tech.com](http://www.asp-electro-tech.com)



This publication is not intended to form the basis of a contract. All the above specifications, dimensions, weights, tolerances etc are typical and may be varied or changed by the manufacturer without prior notice. A.S.P. Electro-Technology accept no liability for consequence of use.