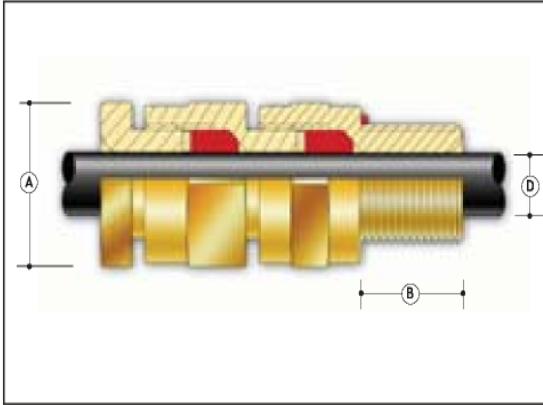







PEPPERS A2LDSF CABLE GLAND

EExd IIC EExe II Increased Safety, Flameproof Zones 1 & 2, 21 & 22

A2LDSF type glands provide two pull resistant seals on the outer sheath of any cable. A2LDSF type glands maintain Flameproof Exd and Increased Safety Exe methods of explosion protection and IP66, IP68 to 25 metres. An integral 'O' ring entry thread seal is fitted to metric versions as standard.

DESIGN STANDARD	EN50014:1998, EN50018:2000, EN50019:2000 and EN 50281-1-1:1998																						
CERTIFICATION	 ATEX II 2 GD, E Exd IIC / E Exe II  GOST R-Exd IICU/Exe IIU  CSA Exd IIC/Exe II 4X, Class 1, Zone 1																						
CERTIFICATE	SIRA 01ATEX1272X - Ex Notified Body No. 0518 POCC GB 05.B00482 CSA 1356011																						
GLAND MARKING	CENELEC and ATEX Example: Peppers GU15 3BT UK A2LDSF SIZE/THREAD XX SIRA 01ATEX1272X  II 2GD IP68 EExdIIC / EExe II (XX = Year Code)																						
APPLICATION	<p>EExd Equipment A2LDSF type glands will only maintain Flameproof Exd integrity when used with cable that is substantially round and compact with extruded bedding. The cable shall be deemed to be effectively filled. Ref: IEC60079-14:2002 Section 10.4.2</p> <table border="1"> <thead> <tr> <th>Gas Group</th> <th>Internal Ignition Source</th> <th>Enclosure Volume</th> <th>Which Zone</th> <th>Use A2LDSF Gland</th> </tr> </thead> <tbody> <tr> <td>IIC, IIB, IIA</td> <td>NO</td> <td>Any</td> <td>Zone 1 or 2</td> <td>YES</td> </tr> <tr> <td>IIB, IIA</td> <td>YES</td> <td>Any</td> <td>Zone 2</td> <td>YES</td> </tr> <tr> <td>IIB, IIA</td> <td>YES</td> <td>2 litres or less</td> <td>Zone 1</td> <td>YES</td> </tr> </tbody> </table> <p>EExe Equipment Gas Group II, Zones 1 and 2</p> <p>Other Equipment Ignitable Dust, Zones 21 and 22</p>			Gas Group	Internal Ignition Source	Enclosure Volume	Which Zone	Use A2LDSF Gland	IIC, IIB, IIA	NO	Any	Zone 1 or 2	YES	IIB, IIA	YES	Any	Zone 2	YES	IIB, IIA	YES	2 litres or less	Zone 1	YES
Gas Group	Internal Ignition Source	Enclosure Volume	Which Zone	Use A2LDSF Gland																			
IIC, IIB, IIA	NO	Any	Zone 1 or 2	YES																			
IIB, IIA	YES	Any	Zone 2	YES																			
IIB, IIA	YES	2 litres or less	Zone 1	YES																			
INGRESS PROTECTION	IP66 and IP68 @ 25 metres, Enclosure Type 4X																						
MATERIALS	Brass CZ121 (A2LDSF) 316 Stainless Steel (A2LDSSF) Aluminium Alloy (A2LDSAF) Outer sheath seal material: Standard (A2LDSF) Neoprene, black. Option (A3LDSF) Silicone, white. Integral entry thread seal: Nitrile is supplied with neoprene outer seal version. Silicone is supplied with silicone outer seal version.																						
VARIATIONS	For lead sheath cables the gland is fitted with a metallic continuity washer: Brass (A4LDSF); 316 Stainless Steel (A4LDSSF)																						
OPTIONS	THREADS	ISO Metric; NPT; NPS; ISO Pipe Thread (BSP Taper, BSP Parallel); PG																					
	SEALS	Extended operating temperature -60°C to +180°C, halogen free versions: Brass (A3LDSF); 316 Stainless Steel (A3LDSSF); Aluminium (A3LDSAF)																					
	PLATING	Zinc (ZP); Nickel (NP); Tin (TP); Electroless Nickel (EN)																					
OPERATING TEMPERATURES	Standard Seals -20°C to +85°C Silicone Seals -60°C to +180°C																						





ACCESSORIES	Locknut - Brass (ACBLN); 316 Stainless Steel (ACSLN); Aluminium (ACALN) Earth Tag - Brass (ACBET), 316 Stainless Steel (ACSET); Aluminium (ACAET) IP Washer - Nylon (ACNSW); Red Fibre (ACFSW) Serrated Lock Washer - 316 Stainless Steel (ACSSW), Galvanised Steel (ACGSW) Shroud - PVC (ACSPVC); PCP (ACSPCP); Low Smoke Zero Halogen (ACSSIO)
EXAMPLE PART NUMBER	Sample: A2LDSF /ZP/20S/M20 A2LDSF: A*LDSF - Gland type and body material (Brass) *2**** - Seal material (Neoprene) ZP - Zinc plating 20s - Gland size with regards to cable acceptance range M20 - Entry thread

Gland Size	Entry Threads		Entry Thread Length [B]	Max Across Corners [A]	Max Protrusion Length	Gland Seal Range		Shroud Size
	Metric	NPT/BSP				Cable Outer Sheath [D]		
						Min	Max	
16	M20	1/2" or 3/4"	16	28.0	66.0	4.0	8.4	L24
20s	M20	1/2" or 3/4"	16	28.0	66.0	7.2	11.7	L24
20	M20	1/2" or 3/4"	16	29.7	66.0	9.6	14.0	L27
25	M25	3/4" or 1"	16	39.6	66.0	13.5	20.0	L36
32	M32	1" or 1 1/4"	16	45.1	66.0	19.5	26.3	L41
40	M40	1 1/4" or 1 1/2"	16	55.9	74.0	23.0	32.2	L51
50s	M50	1 1/2" or 2"	16	71.5	74.0	28.2	38.2	L65
50	M50	2"	16	71.5	74.0	33.2	44.1	L65
63s	M63	2" or 2 1/2"	19	88.0	74.0	39.3	50.1	L80
63	M63	2 1/2"	19	88.0	74.0	46.7	56.0	L80
75s	M75	2 1/2" or 3"	19	99.0	74.0	52.3	62.0	L90
75	M75	3"	19	99.0	74.0	58.1	68.0	L90
80	M80 x 2	3" or 3 1/2"	25	115.2	100.0	62.3	72.0	L104
85	M85 x 2	3" or 3 1/2"	25	115.2	100.0	69.1	78.0	L104
90	M90 x 2	3 1/2" or 4"	25	125.7	100.0	74.1	84.0	L114
100	M100 x 2	3 1/2" or 4"	25	125.7	100.0	82.1	90.0	L114

All Dimensions are in Millimetres

NOTES:

- Suitable only for fixed installations. The cable must be clamped near the gland to prevent pulling and twisting
- Gland Size does not necessarily equate to the entry thread size
- Integral entry thread seal option is not available for glands with tapered entry threads. IP washers can be supplied if required
- Please note that dimensions (A) and (B) may differ for glands with non-Metric entry threads. Please refer to our thread data tables for specific dimensions
- Unless otherwise stated ISO Metric entry threads have a 1.5mm pitch
- For Flameproof Exd applications the female thread into which the gland is to be fitted must comply with clause 5.3 of EN 50018:2000 (clause 5.3 IEC 79-1) and an engagement of at least 5 full threads must be achieved for parallel threads and should be achieved for tapered threads
- Where A2LF type glands are fitted into non-metallic Increased Safety Exe enclosures they must be included within the earth circuit of the system
- The user should seek expert advice if intending to combine flammable gases and combustible dusts in one environment/ installation
- Full assembly instructions are supplied with glands, the instructions must be read prior to installation and adhered to in full

Supplied by:

A.S.P. Electro-Technology Ltd
Specialist Suppliers of Hazardous Area Certified
Electrical Products & Instrumentation

39 London Road, Hinckley, LE10 1HQ. U.K.
Tel: +44 (0)1455 635796 Fax: +44 (0)1455 251110
Email: sales@asp-electro-tech.com Web: www.asp-electro-tech.com



This publication is not intended to form the basis of a contract. All the above specifications, dimensions, weights, tolerances etc are typical and may be varied or changed by the manufacturer without prior notice. A.S.P. Electro-Technology accept no liability for consequence of use.