



Current limit 35 mA

- 1-channel
- Output EEx ia IIC
- Device installation permissible in zone 2
- 24 V DC nominal supply voltage
- Usable up to SIL 3 acc. to IEC 61508

Standard type KFD2-SL2-Ex1.B


Function

The KFD2-SD-Ex1.48 and the KFD2-SD-Ex1.48.90A receives its power supply from the applied input signal. The input and output are galvanically isolated from each other. The voltage applied to terminals 7+ and 8- is transferred to the output by means of a DC/DC converter. For supply voltages up to 18 V, the open circuit output voltage is about 1.3 times the supply voltage. The input current is dependent on the load and carries a max. of 70 mA for the KFD2-SD-Ex1.48 or a max. of 85 mA for the KFD2-SD-Ex1.48.90A. The output current is limited to 35.3 mA or 45.3 mA. For an input voltage of above 18 V, the output voltage is limited by the internal Zener diodes. The open circuit voltage for both devices is DC 22.8 V. The output voltage and the output current are dependent on the load as well as the input voltage.

Application

Control/supply for intrinsically safe valves, audible alarms, indicators etc. Supply of semiconductor in case of evaluation of lead breakage. If semiconductors (e. g. LED or LCD-units) are controlled, a parallel resistance of approx. 10 kOhm directly at the consumer may be necessary.


SOLENOID DRIVER
KFD2-SD-Ex1.48
EExd ED 11c T6

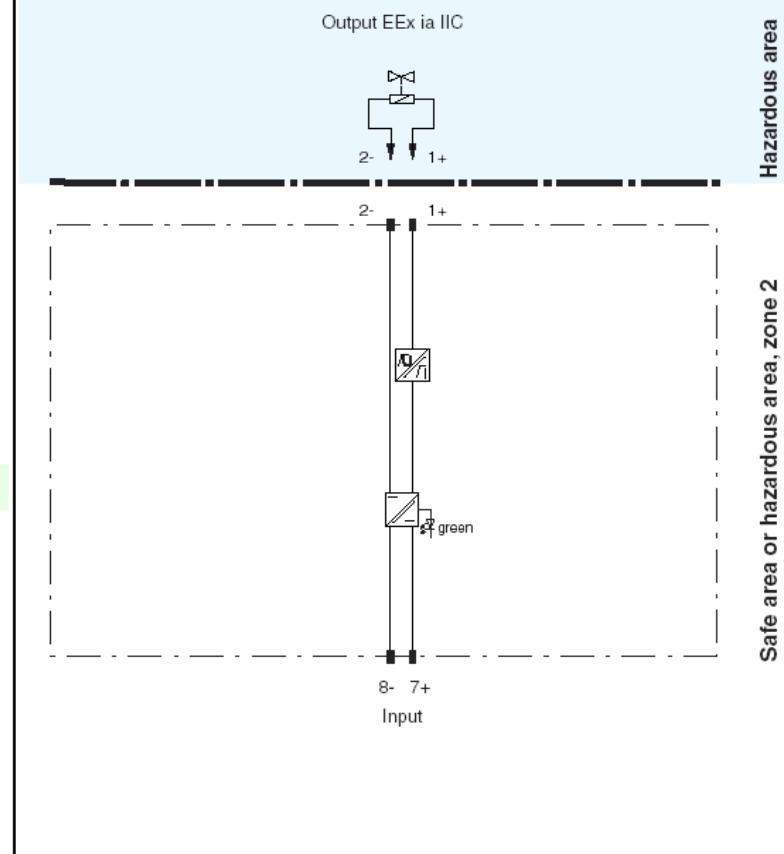

Composition

Front View

Housing type A3
 (see system description)

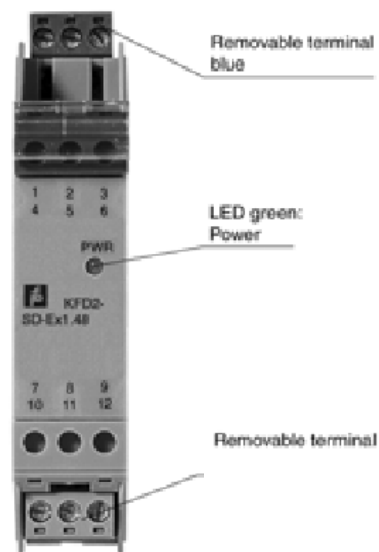



Supply	
Rated voltage	-
Power loss	1,3 W
Input	
Connection	terminals 7+, 8-
Rated voltage U_a	5 ... 35 V DC
Current	6 mA at 18,5 V nominal supply voltage, 70 mA at 35 V nominal supply voltage
Output	
Internal resistor	$\leq 303 \Omega$
Limit	current $I_E: \geq 35,3 \text{ mA}$ voltage $U_E: 12,1 \text{ V}$
Open loop voltage	$\geq 22,8 \text{ V}$
Connection	terminals 1+, 2-
Output rated operating current	35 mA
Output signal	These values are valid for the rated operational voltage 20 ... 35 V DC.
Directive conformity	
Electromagnetic compatibility	standards
Directive 89/336/EC	EN 61326, EN 50081-2, NE 21
Standard conformity	
Climatic conditions	acc. to DIN IEC 721
Ambient conditions	
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Mechanical specifications	
Protection degree	IP20
Mass	approx. 100 g
Data for application in conjunction with hazardous areas	
EC-Type Examination Certificate	BAS 00 ATEX 7216 , for additional certificates see www.pepperl-fuchs.com
Group, category, type of protection	Ex II (1) G D [EEx ia] IIC (-20 °C $\leq T_a \leq$ 60 °C) [circuit(s) in zone 0/1/2]
Output	EEx ia IIC
Voltage U_o	25,2 V
Current I_o	93 mA
Power P_o	590 mW
Type of protection [EEx ia]	
Explosion group	IIA IIB IIC
External capacitance	2,9 μF 0,82 μF 0,107 μF
External inductance	36,02 mH 17,72 mH 4,3 mH
Input	
Safety maximum voltage U_m	250 V (Attention! The rated voltage can be lower)
Statement of conformity	
Group, category, type of protection, Temperature classification	Ex II 3 G EEx nA II T4 [device in zone 2]
Electrical isolation	
Input/Output	safe electrical isolation acc. to EN 50020, voltage peak value 375 V
Directive conformity	
Directive 94/9 EC	EN 50014, EN 50020, EN 50021
Entity parameter	
Certification number	4Z6A5.AX
FM control drawing	No. 116-0129
Suitable for installation in division 2	yes
Connection	terminals 1, 2
Input I	
Voltage V_{OC}	28 V
Current I_I	93 mA
Explosion group	A&B C&E D, F&G
Max. external capacitance C_a	0,14 μF 0,43 μF 1,14 μF
Max. external inductance L_a	4,18 mH 5,83 mH 34,21 mH
Safety parameter	
CSA control drawing	LR 65756-13
Control drawing	No. 116-0132
Connection	terminals 1, 2
Input I	
Safety parameter	28 V / 300 Ohm
Voltage V_{OC}	28 V
Current I_{SC}	93 mA
Explosion group	A&B C&E D, F&G
Max. external capacitance C_a	0,14 μF 0,42 μF 1,14 μF
Max. external inductance L_a	3,1 mH 16,7 mH 34 mH

Supplementary information

EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity and instructions have to be observed.

Supplied by:

A.S.P. Electro-Technology Ltd
Specialist Suppliers of Hazardous Area Certified
Electrical Products & Instrumentation

39 London Road, Hinckley, LE10 1HQ. U.K.
Tel: +44 (0)1455 635796 Fax: +44 (0)1455 251110
Email: sales@asp-electro-tech.com Web: www.asp-electro-tech.com



This publication is not intended to form the basis of a contract. All the above specifications, dimensions, weights, tolerances etc are typical and may be varied or changed by the manufacturer without prior notice. A.S.P. Electro-Technology accept no liability for consequence of use.