

## VL64 Equal Plus EX FLOODLIGHT

The totally redesigned VL64 Equal Plus floodlight range is ideal for use in lighting open areas within Zone 1 & 2 hazardous applications. It accommodates high pressure discharge lamps up to 400W and also single ended tungsten lamps up to 500W. A choice of either wide or narrow beam reflectors combined with the different lamps and wattages increases the users choices dependant on the lighting task required.

The luminaire is manufactured from corrosion resistant aluminium alloy - LM6 and is available with either a painted or PTFE finish. It has an Ex e terminal chamber as standard, allowing the use of less expensive cable glands. Re-lamping is kept simple accessing via the hinged front cover which is fitted with captive cover screws.



Available for a wide range of ambient temperature locations from -20°C up to +70°C (dependant on wattage) the VL64 Equal Plus is truly a product for the world market.

### Standard Specification

Type of Protection:	<b>Ex de (Flameproof Increased Safety) Dust protected enclosure</b>
ATEX Classification:	<b>Group II Category 2 G D</b>
Area Classification:	<b>Zone 1 and Zone 21 areas to EN 60079-10 and EN 50281-3 with installation to EN 60079-14 and EN 50281-1-2 Gas Groups IIA and IIB</b>
Apparatus Standard:	<b>EN 50014 EN 50018 EN 50019 EN 50281-1-1</b>
Certificate:	<b>EC Type Examination Certificate Baseefa05ATEX0228</b>
Coding:	<b>II 2 G D EEx de IIB (refer to table for T rating and Ambient)</b>
Enclosure:	<b>Aluminium alloy LM6 to BS 1490 All fastenings stainless steel. Toughened glass window</b>
Reflector:	<b>Wide beam, high purity anodised aluminium</b>
Entry:	<b>2 x M20 cable entries</b>
Termination:	<b>3 core 6mm<sup>2</sup> max. conductor with looping</b>
Installation:	<b>Stirrup mounting bracket with aiming quadrant</b>
Control Gear:	<b>Internal copper/iron with PFC correction capacitor and ignitor</b>
Relamping:	<b>Access via hinged front cover c/w captive screws</b>
Lampholder:	<b>E40</b>
Lamp Type:	<b>HPS, Metal Halide or Tungsten-Halogen</b>
Burning Position:	<b>Universal for HID, +/-45° on horizontal plane for Tungsten-Halogen lamps</b>
Ingress Protection:	<b>IP66/67 to EN 60529</b>
Electrical Supply:	<b>220, 230, 240, 254V 50Hz HPS &amp; Metal Halide</b>


### Features

Installation in gas groups  
IIA and IIB

Good photometric  
efficiency

Effective light distribution  
for many applications







Std. Cat No.	Wattage	Lamp	T Class (Gas)	T Class (Gas)	Ambient °C	Weight
64ED/150/MS	150W	HPS and Metal Halide	T4	128	70	28kg
64ED/250/MS	250W	HPS and Metal Halide	T4 T3	128 145	55 70	28.5kg
64ED/400/MS	400W	HPS and Metal Halide	T3	175 (HPS) 160 (MH)	55	28.5kg
64ED/500/TH	500W	Single Ended T/Halogen	T3	175	55	25kg

**Options - Suffix to Catalogue No.**

/60	60Hz
/M25	M25 Entries
/N	Narrow beam reflector
/P	PTFE coating
/PA	Painted Finish
/TI	Timed Ignitor

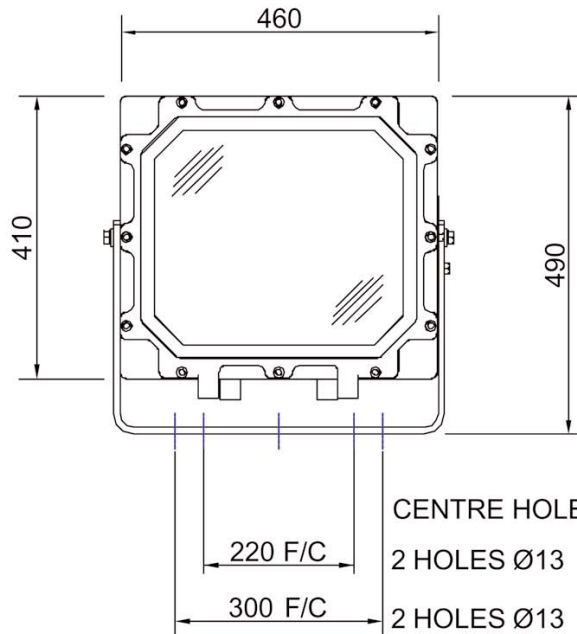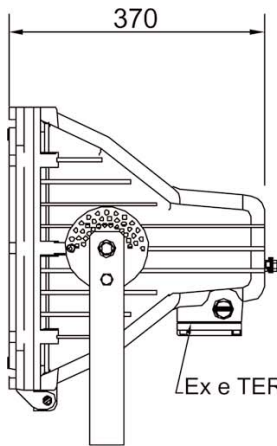

WINDAGE : 0.19 M<sup>2</sup>

**Accessories** (Should be ordered separately)

**Catalogue Order Code**

Pole mounting brackets	S2854-0001
Anti-glare shield	S2854-0002
Wire guard	S2854-0003

**Supplied by:**

**A.S.P. Electro-Technology Ltd**



39 London Road, Hinckley, LE10 1HQ. U.K.  
Tel: +44 (0)1455 635796 Fax: +44 (0)1455 251110  
Email: sales@asp-electro-tech.com  
Web: asp-electro-tech.com

This publication is not intended to form the basis of a contract. All the above specifications, dimensions, weights, tolerances etc are typical and may be varied or changed by the manufacturer without prior notice. A.S.P. Electro-Technology accept no liability for consequence of use.