

Pressure Transmitter: Analogue Series 387

Key Features

- High Accuracy $\pm 0.15\%$.
- Ranges from 1 bar to 1000 bar.
- 4 : 1 turndown.
- 4-20mA analogue with digital communications.
- 316 stainless steel investment Cast Enclosure.
- NEMA 4X, IP66 weatherproof rating.
- Stainless Steel, Monel and Hastelloy "Wetted Parts" options.
- NACE MR-01-75 compatibility.
- All welded construction.

Performance characteristics

Enclosure options

- Weatherproof IP66 Protection – NEMA 4X
- Intrinsically safe – EExia ATEX
- Flameproof – EExd ATEX

Wetted parts options

- Welded 316 stainless steel sensor and process connection.
- Welded Nickel Alloy (Monel) sensor and process connection.
- Welded Hastelloy sensor and process connection.

Signal output

- Refer to table 6.

Process connection

- 1/2" NPT External
- G 1/2" A to ISO 228 (1/2" BSP Parallel Male, spigotted).
- High pressure cone and thread (autoclave) 9/16" UNF.

Unit weight

- 900g

Accuracy

- For turndowns of 1:1 to 4:1 $\pm 0.15\%$ of span.

Product applications

The 387 is suitable for a wide range of applications in many Industry sectors:

- Oil & Gas
- Chemical
- Petrochemical
- Water
- Power

The choice of models available ensures that the 387 is:

- Suitable for use in corrosive atmospheres
- Resistant to chemical attack



Enclosures:

FINISH

All enclosures are investment cast in 316 Stainless Steel and offer environmental protection to (NEMA TYPE 4X) IP66.

NOTE: Instruments subject to National or International approval may be limited in terms of options available. See notes adjacent to relevant tables.

	Code:
Intrinsically Safe to EN50 014 & EN50 020 EEx ia IIC T4 @ 90°C EEx ia IIC T5 @ 40°C	4
Flameproof to EN50 014 & EN50 018 EEx d IIC T6 @ 40°C	R
Weatherproof only IP66/NEMA 4X	A
Factory Mutual Listed Explosionproof Class I, II & III Div 1 Gp BCDEFG Intrinsically Safe Class I, II & III Div 1 Gp ABCDEFG Non Incendive Class I, II & III Div 1 Gp ABCDFG	F

Models:

Single Pressure transmitter	Code: 387
-----------------------------	---------------------

Electrical Entry:

M20 x 1.5 (ISO) and 1/2" NPT Internal threads available as standard. Other threads e.g. Pg 13.5, can be made available via adaptors.

M20 x 1.5 Internal thread (standard)	Code: 1
1/2" NPT Internal thread	Code: 2

Material of Wetted Parts:

Options T, U and C are all compatible with the requirements of NACE MR 01-75. Other factors in highly aggressive chemical environments may determine the final choice.

For Sour-gas and Crude applications, Code C offers the most cost effective solution.

Monel Code T is preferred for highly oxidising media, such as pure Oxygen and Chlorine.

	Code:
For liquids and gases. Welded 316 stainless steel sensor and process connection. Ranges 0 to 1 bar up to 0 to 6 bar.	R
For liquids and gases. Welded 17-4 PH or 15-5 PH sensor to 316 stainless steel process connection. Ranges 0 to 10 bar up to 0 to 1000 bar.	S
Welded nickel alloy (Monel) sensor and process connection. Ranges 0 to 10 bar up to 0 to 1000 bar (Suitable for NACE MR-01-75).	T
Welded Hastelloy C sensor and process connection. Ranges 0 to 10 bar up to 0 to 1000 bar. (Suitable for NACE MR-01-75).	U
Welded Hastelloy C sensor to annealed stainless steel process connection. Ranges 0 to 10 bar up to 0 to 1000 bar. (Suitable for NACE MR-01-75)	C

Setting Ranges:

The values shown in this table are the UPPER RANGE LIMIT (URL); a 4:1 turndown facility enables full 4 to 20mA output to be obtained for a working span equal to 25% of URL.

Unless specified, the instruments are despatched with LOWER RANGE VALUE (LRV) set to zero and UPPER RANGE VALUE (URV) set to URL.

Ranges shown are to gauge (i.e. atmospheric reference; absolute pressure is called up by amending the last character of the three character range code:

Bar/mbar absolute	Code: **A
Psi absolute	Code: **Q

If range settings are required which cannot be achieved within the adjustment range of zero and span controls, refer to special engineering.

Medium Pressure:

Material Code "R" only. (Table 4)

- Accuracy $\pm 0.15\%$
- Maximum working pressure
- $P_{max} 2 \times URL$.

Available on models 4387, A387 and F387*

*Intrinsically Safe and Non incendive only

Bar	Code	PSI	Code
0 to 1	DAB	0 to 16	DAP
0 to 1.6	DBB	0 to 25	DBP
0 to 2	D2B	0 to 30	D2P
0 to 2.5	DCB	0 to 40	DCP
0 to 4	ddb	0 to 60	ddp
0 to 6	DEB	0 to 100	DEP

High Pressure:

Material Codes "S, T, U and C". (Table 4)

- Code S: Accuracy $\pm 0.15\%$
- Maximum working pressure (P_{max})
- $2 \times URL$.
- Codes T,U and C: Accuracy
- $\pm 0.25\%$.
- Maximum working pressure (P_{max})
- $1.5 \times URL$.

*Subject to 1500 bar (22,500psi) maximum.

Available on models 4387, A387, F387 and R387.

Note: Range codes GAB and GAP are only available with wetted parts codes 'S', 'U' and 'C' Ref. Table 4.

Bar	Code	PSI	Code
0 to 10	EAB	0 to 160	EAP
0 to 16	EBB	0 to 250	EBP
0 to 25	ECB	0 to 400	ECP
0 to 40	EDB	0 to 600	EDP
0 to 60	EEB	0 to 1000	EEP
0 to 100	FAB	0 to 1600	FAP
0 to 160	FBB	0 to 2500	FBP
0 to 250	FCB	0 to 4000	FCP
0 to 400	FDB	0 to 6000	FDP
0 to 600	FEB	0 to 10,000	FEP
0 to 1000	GAB	0 to 15,000	GAP

Signal Output:

All 4-20mA.
Code M is only available with wetted part material codes C or U. Ref Table 4.

4 to 20mA, 2-wire system. 4mA equivalent to nominal zero input pressure. Span of unit adjustable so that 20mA may be equivalent to any pressure between 25% and 100% of Upper Range Limit. Maximum permitted voltage between circuit and case, 50V DC	Code: 6
4 to 20mA, 2-wire system. 4mA equivalent to nominal zero input pressure. Span of unit adjustable so that 20mA may be equivalent to any pressure between 25% and 100% of Upper Range Limit. Maximum test voltage between circuit and case, 500V AC.	Code: M

Process Connection:

Other thread specifications and sizes are available without using adaptors.

Adaptors are available for applications where their use is permitted.

NOTE: All 1/2" NPT process connections are limited to a maximum over range pressure of 1200 bar / 17,500 psi.

	Code:
1/2" NPT Male external (standard)	J
G1/2"A to ISO 228 (1/2" BSP Parallel Male, spigotted)	N
High Pressure Cone and Thread (Autoclave) 9/16" UNF	V

Options and Treatments:

For requirements that fall outside the specifications listed above we will be pleased to advise on your particular application.

	Code:
Panel Mounting Clamp in Stainless Steel	Apply for details
Pipe Mounting Clamp in Stainless Steel	
Approved IS Indicator in Hazardous Area	
Instrument Valves	Specify in full
Chemical Seal (Remote or direct)	
Oxygen Service 2: Process (wetted) parts are cleaned for oxygen.	04
Tagging – Variety of tagging methods are available	Apply for details
Applies when no option is required and selection is made from SPECIAL ENGINEERING	00

Special Engineering:

To your individual requirements, where specified. For your convenience, enter your special listing in space provided.

PLEASE CONSULT DELTA SALES ENGINEERING	Code: TBA
--	----------------------

Technical Specification:

Output:	4 to 20mA proportional to pressure, 2-wire
Power Supply:	12 to 38V DC at instrument terminals. Reverse polarity protected. Less than .01% per volt effect.
Accuracy:	Less than ±0.15% of URV*, including combined effects of linearity, hysteresis and repeatability
Long Term Stability:	Less than ±0.15% of URL*, over a 6 month period.
Ambient Temperature:	-20 to +85°C (-4 to +185°F)
Process Temperature:	-40 to +120°C (-40 to +240°F)
Compensated Range:	-20 to +85°C (-4 to +185°F)
Ambient Temperature:	Less than ±0.025% of URL*, for every 1 deg C (1.8 deg F) change in ambient temperature.
Vibration Tolerance:	5g peak to peak sinusoidal at 5 to 200Hz.
Radio Frequency Interference Effect:	Induced error shall not exceed ±0.15% of URL*, when tested to IEC 801-3 severity level 3 (10v/m) with cover closed)
Warm-Up Time:	250 milliseconds typical
Response Time:	150 milliseconds typical
Adjustability:	Zero ±5% Full range Range 4:1 turndown.


**For definitions see Table 5*

Order Code:


Table 1 (Enclosure)	Table 2 (Models)	Table 3 (Electrical Entry)	Table 4 (Wetted Part)	Table 5 (Setting Ranges)	Table 6 (Switch)	Table 7 (Signal Output)	Table 8 (Process Connection)	Table 9 (Options/Treatments)	Table 10 (Special Engineering)

Operation / Installation:

WIRING AND ADJUSTMENT

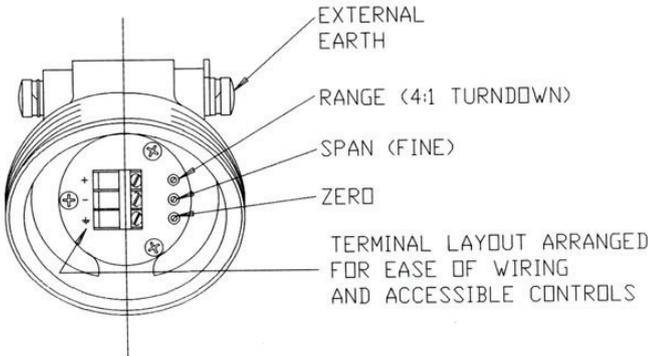

VOLTAGE v LOAD

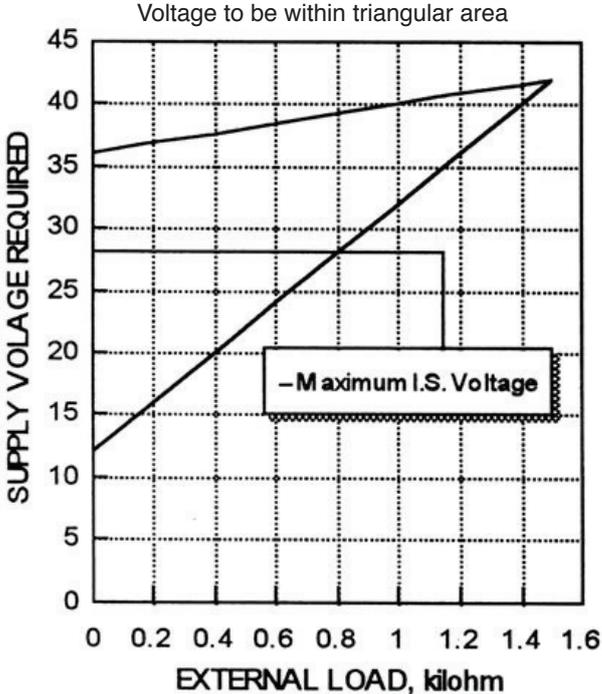

Approvals:

CENELEC/BASEEFA (EECS)		CENELEC/BASEEFA	
	<p>Intrinsically Safe. BASEEFA certified to CENELEC EN 50 014 and EN50 020 for use in Zone 1 hazardous areas.</p> <p>Enclosure Codes 4 and all ranges.</p> <p>Certificate No ITS03ATEX21062X System Certificate</p>		<p>Flameproof / Weatherproof BASEEFA certified to CENELEC EN 50 014 and EN50 018 for use in Zone 1 hazardous areas.</p> <p>Enclosure Code R and all ranges 10 bar (160 psi) and above.</p> <p>Certificate No BAS02ATEX2191</p>
FACTORY MUTUAL RESEARCH CORPORATION			
	<p>FM Approved for use in Divisions 1 and 2.</p> <p>Enclosure Code F; see Table 5 for limitations on ranges.</p> <p>File number 4V3A8.AX & 2X6A6.AX</p>		