

A.S.P. Electro-Technology Ltd


Tel: +44 (0) 1455 635796
Fax: +44 (0) 1455 610851


sales@asp-electro-tech.com
www.asp-electro-tech.com

Ex de

SLEE

- Suitable for high (+55°C) and low (-50°C) temperatures
- Elevated degree of protection IP67
- IIB + H2 marking (hydrogen)
- Zones 1, 2, 21, 22

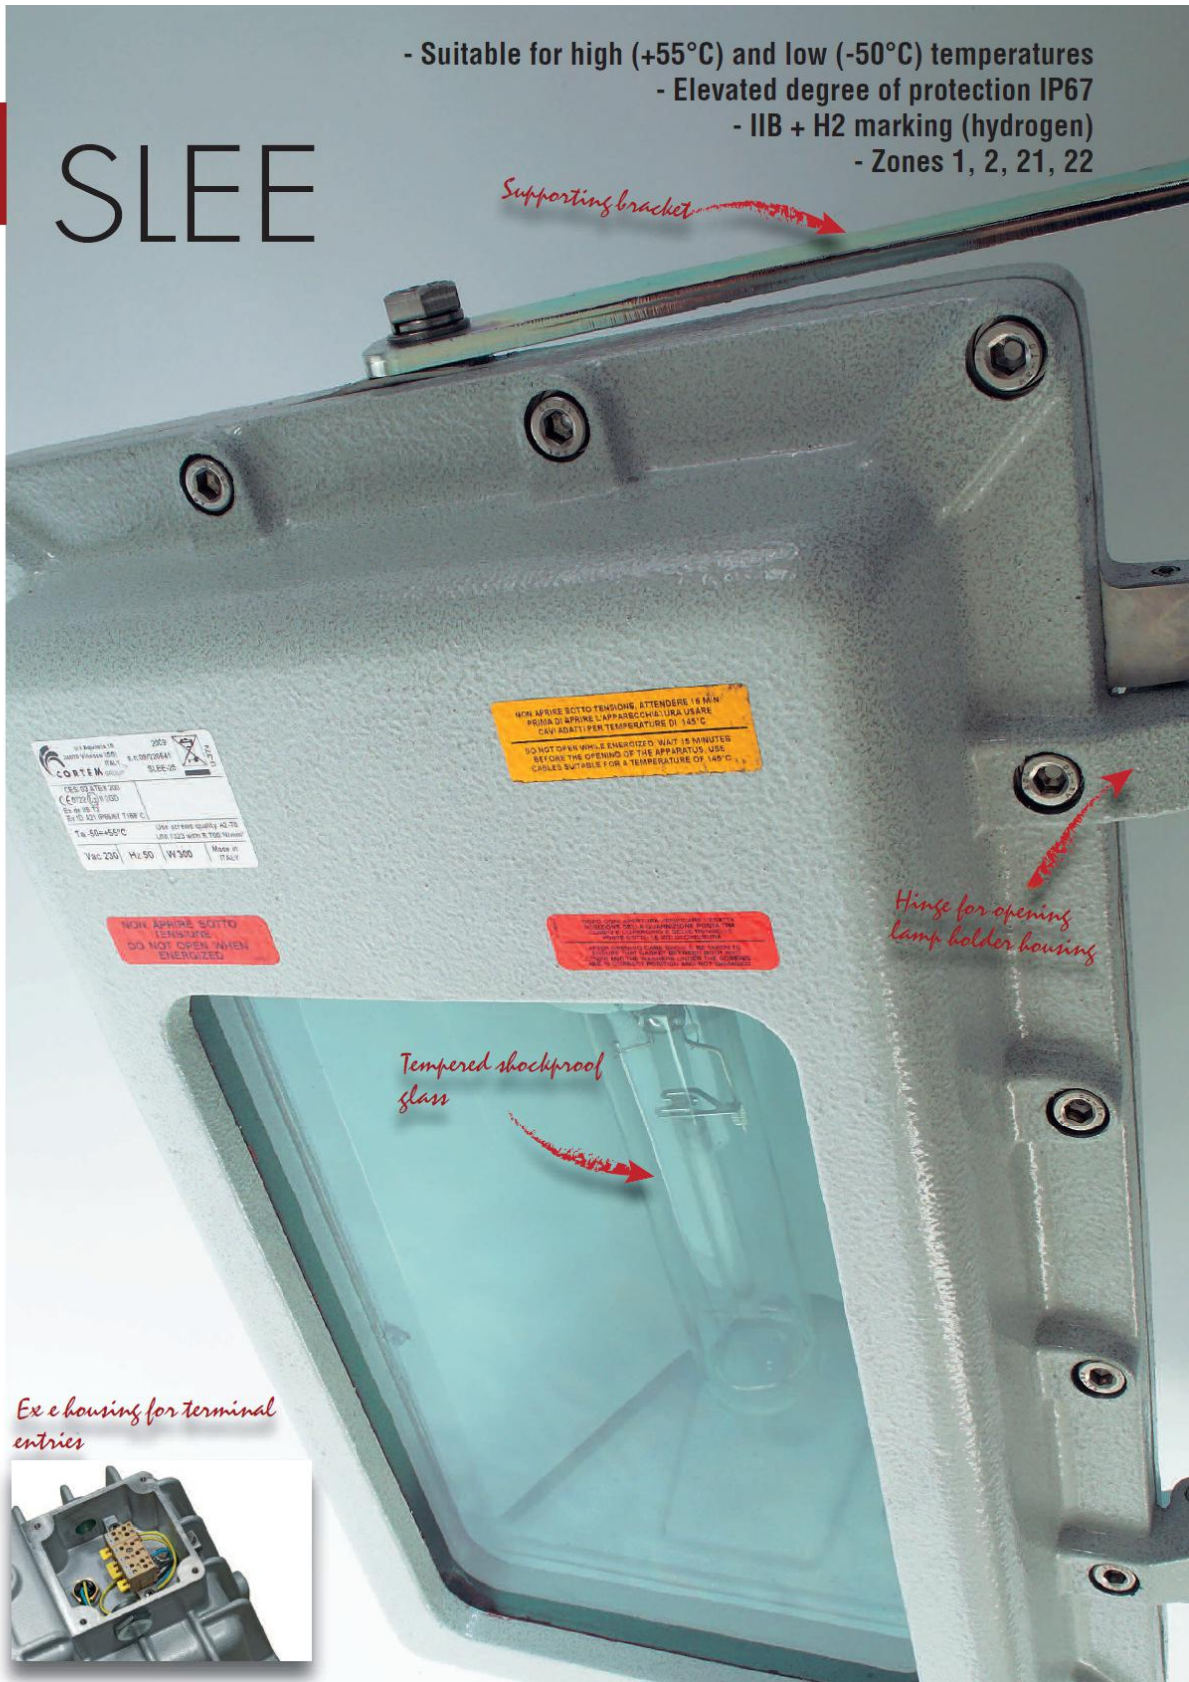

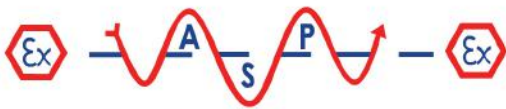

SLEE series Rectangular horizontal floodlights

Ex de

SLEE series floodlights have been specially designed for lighting large indoor and outdoor areas in hazardous zones. Thanks to their versatility and small size, they are the ideal solution for those seeking a balance of quality and value for money. Apart from being suitable for use in environments where there is hydrogen (H₂) present, they are also certified with a high degree of mechanical protection (IP67) and guarantee a symmetrical and concentrated distribution of light. The symmetrical reflector makes sure that the light is spread symmetrically in all directions to provide uniform lighting. Electrical connection with the floodlight is made via a terminal board in a "Ex e" enclosure that allows the entry to the lighting fixture through a cable gland with an "Ex" O-ring (non barrier) as specified in the installation specification standards (EN/IEC 60079.14).

As these units comply with international standards (IEC Ex), they can be installed anywhere in the world. SLEE series floodlights also comply with anti light pollution standards (Regional Law date 27 March 2000 N°17 – Article 6).


Application sectors:



CERTIFICATION DATA


Classification	Group II	Category 2GD		
Installation EN 60079.14	zone 1 - zone 2 (Gas)	zone 21 - zone 22 (Dust)		
Marking:	CE 0722 Ex II 2GD Ex de IIB + H2 T2/T3/T4 - Ex tD A21 IP 66/67			
Certification:	ATEX	CESI 03 ATEX 200		
	IEC Ex	CES 18.0003X	All IEC Ex and TR CU certification data can be downloaded at www.cortemgroup.com	
	TR CU	AVAILABLE		
Standards:	CENELEC EN 60079-0: 2006, EN 60079-1: 2004, EN 60079-7: 2007, EN 61241-0: 2006, EN 61241-1: 2004, EN60598-1:2008+A11:2009, EN60598-2-5:1998, EN61547:2009 and EUROPEAN DIRECTIVE 2014/34/UE IEC 60079-0:2004, IEC 60079-1:2007, IEC 60079-7:2006, IEC 61241-0:2004, IEC 61241-1:2004 European Directive 2006/95 Low voltage European Directive 2004/108 Electromagnetic compatibility European Directive 2003/108 WEEE Waste electrical and electronic equipment European Directive 2011/64 RoHS			
Class temperature:	300°C (T2)	200°C (T3)	135°C (T4)	
Ambient temperature:	Standard (IIB+H2) -20°C +55°C	Special (IIB) -50°C +55°C		
Degree of protection:	IP66/67			

This equipment can be used in an environment containing explosive atmosphere and with the presence of hydrogen.

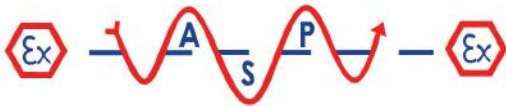

SLEE series Rectangular horizontal floodlights

Ex de

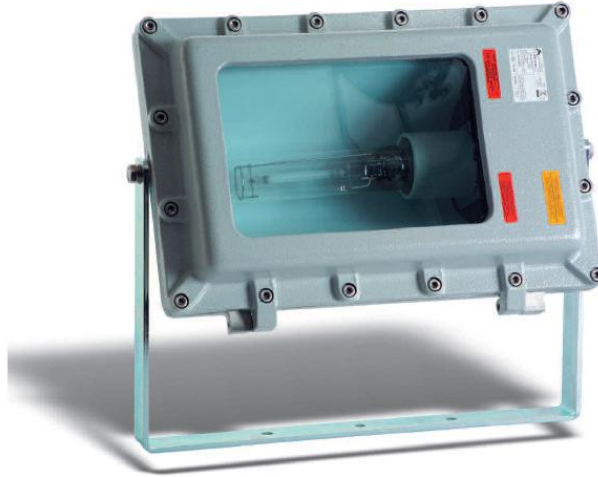

ORIGINAL PRODUCT

MECHANICAL FEATURES


Body:	Low copper content aluminium alloy
Glass face:	Shock and high temperature resistant tempered glass
Gaskets:	Acid/hydrocarbon resistant NBR
Internal reflector:	Anodised aluminium
Supporting bracket	Galvanised steel
Mounting:	3 x Ø12 holes
Bolts and screws:	Stainless steel
Entries:	2 x ISO M25 entries. Floodlight set with 1 x PLG2IG plug
Coating:	Polyester coating Ral 7035 (Light grey)
Corrosion Resistance :	The STANDARD of the aluminium alloy used by Cortem has passed the tests required by standards EN60068-2-30 (hot/humid cycles) and EN60068-2-11 (salt mist tests)

ELECTRICAL FEATURES


Lamp holder:	E40 ceramic
Rated voltage:	230 V AC
Rated frequency:	50 Hz
Connection:	Direct connection to the terminal board L, N, Pe. Section 4 mm ² , suitable for input/output
Wiring:	Silicone rubber cables with glass braid insulation for high temperatures
Power factor:	0.96

ACCESSORIES AVAILABLE / SPECIAL REQUESTS


- Discharge lamp
- Different rated voltages
- Cable gland: REV2IB for armoured cable or REV2IB for non-armoured cable
- Angular orientation system
- Reinforced supporting bracket for mounting on mobile structures
- Frame for mounting floodlight on pole




SLEE series dimensional drawings

Code	Dimensions mm					Type of lamp	Lamp holder	Watt	Class Ta +55 °C	Max surface temp °C	Weight Kg	 mm
	A	B	C	a	b							
SLEE-40IM5	296	482	480	174	291	metal halide	E40	250	T3	165	26	550x350x540
SLEE-40IM6	296	482	480	174	291	metal halide	E40	400	T3	191	27	550x350x540
SLEE-40N5	296	482	480	174	291	high pressure sodium	E40	250	T3	168	26	550x350x540
SLEE-40N6	296	482	480	174	291	high pressure sodium	E40	400	T2 (T3 Ta+53°C)	201	27	550x350x540


Ex de

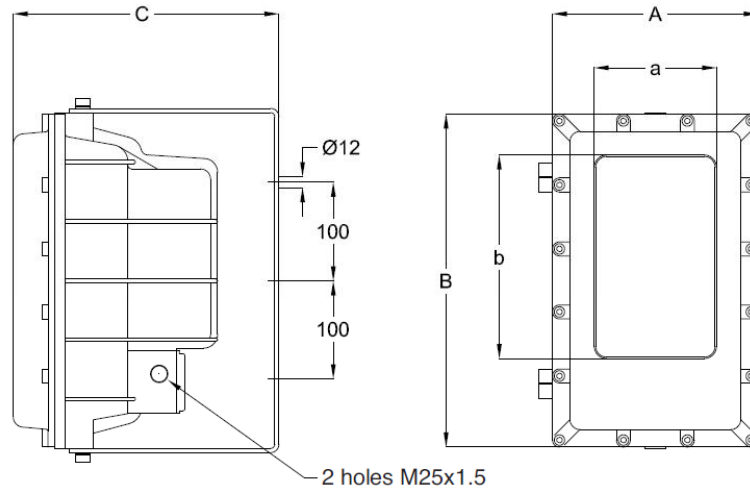

SLEE-40 floodlight kits with 400 W ballast are supplied as standard with a separate enclosure housing starter and capacitor.

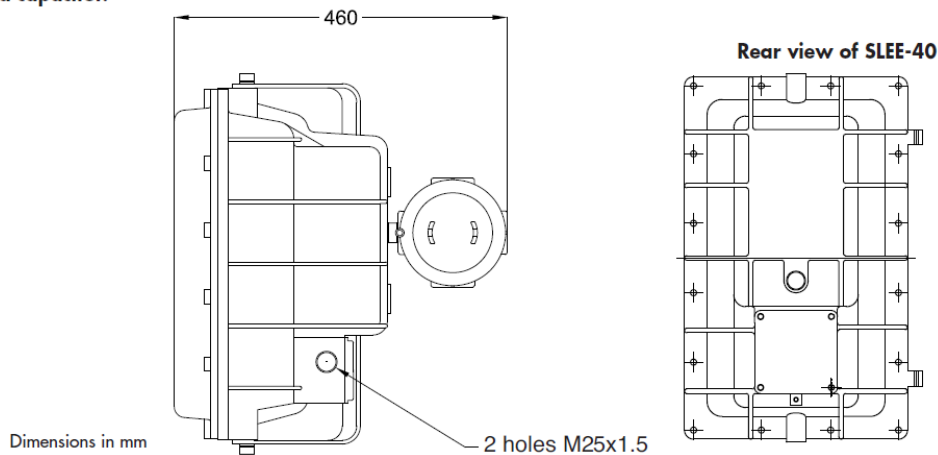


Dimensions in mm



SLEE series Accessories and spare parts available on request

Ex de


ILLUSTRATION	DESCRIPTION	MODEL	FEATURES	CODE	KEY
	High pressure sodium vapour lamp	E40	250 W (ST250W)	LAMPNAV250WPLU	
			400 W (ST400W)	LAMPNAV400WPLU	
	Metal halide lamp	E40	250 W (MT250W)	LAMP250WJMT	
			400 W (MT400W)	LAMP400WJMT	
	Reinforced supporting bracket for mounting on mobile structures	SLEE-40	Material: galvanised steel	G-418/1	
	Cable gland	ISO M25	For models and codes, visit www.cortemgroup.com	REV21B REV21B	
	Front ring with glass	SLEE-40	In copper free aluminium with tempered glass front	G400-0322	
	Supporting bracket	SLEE-40	Material: galvanised steel	G-418	
	Angular orientation system fitted to supporting bracket (locking point every 15°)		Material: stainless steel	G-604	
	Frame for mounting floodlight on pole		Material: galvanised steel	G-0534	
	Sodium vapour and metal halide ballast	250 W	230V 50Hz	R-250NA	
		400 W		R-400NA	
	Ceramic lamp holder	E40	750V - 16A	PORT.E40	




SLEE series Accessories and spare parts available on request

ILLUSTRATION	DESCRIPTION	MODEL	FEATURES	CODE	KEY
	Metal capacitor Sodium vapour	250 W	35µF 250V	F-35	
		400 W	50µF 250V	F-50	
	Metal capacitor Metal halide	250 W	30µF 250V	F-30	
		400 W	40µF 250V	F-40	
	Igniter		50-400 W	R 100	
	Reflector	SLEE-40	Material: anodised aluminium	G-726	


Ex de

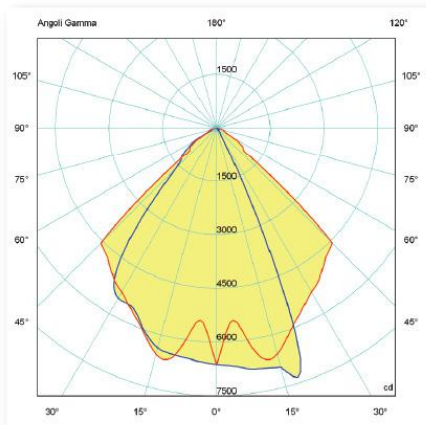


SLEE-40N5 250W Sodium

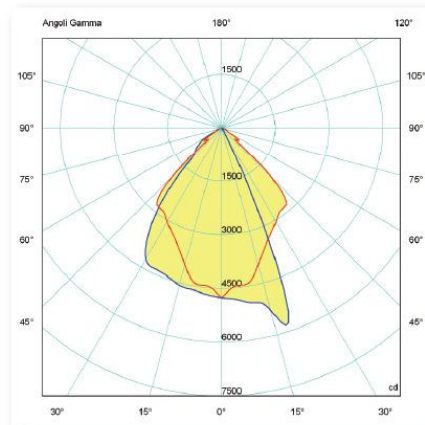

SLEE-40IM5 250W Halide

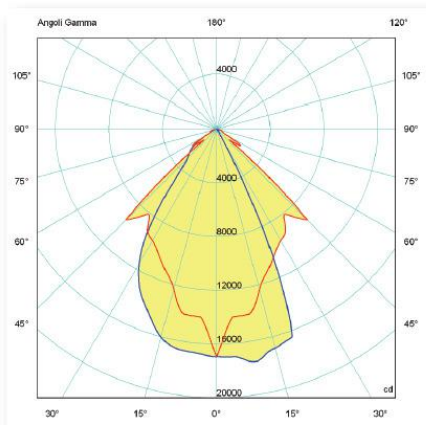

SLEE-40N6 400W Sodium

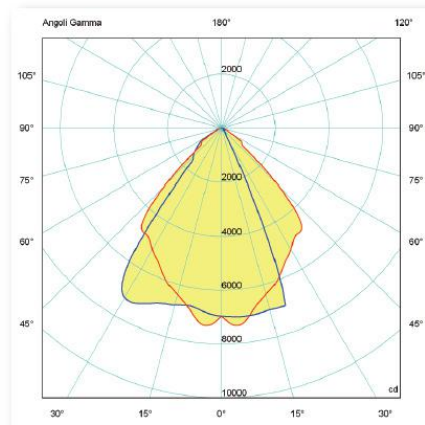

SLEE-40IM6 400W Halide

— = plane 90270
 — = plane C 0180