


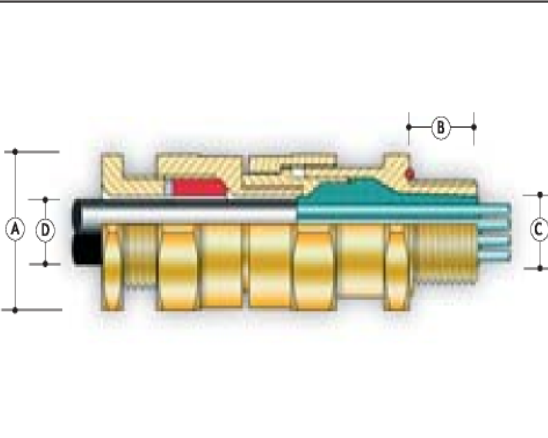


PEPPERS CR-U BARRIER GLAND

EExd IIC Increased Safety, Flameproof Zones 1 & 2, 21 & 22

Croclock CR-U type glands provide a Flameproof EExd compound filled barrier, a secondary weather seal on the outer sheath and an entry thread seal. Croclock CR-U type glands maintain EExd Flameproof method of explosion protection; IP66, 68 to 100 metres and is deluge resistant.

DESIGN STANDARD	EN50014:1998, EN50018:2000 & EN 50281-1-1:1998 IEC 60079-0 (2000-06), IEC 60079-1 (2001-02)												
CERTIFICATION	 ATEX I M2 II 2 GD, E Exd I & IIC GOST R-Exd I & IICU CSA Exd I & IIC 4X, Class 1, Zone 1												
CERTIFICATE	SIRA 03ATEX1479X - Ex Notified Body No. 0518 POCC GB 05.B00974 CSA - Pending												
GLAND MARKING	CENELEC & ATEX Example: SIRA 03ATEX1479X  I M2 II 2GD EExd I & IIC IP68 PEPPERS UK / XX / CR-UB - 20S (XX = Year Code)												
APPLICATION	EExd Equipment CR-U type glands will maintain Flameproof Exd integrity when used with any unarmoured cable types. Ref: IEC60079-14:2002 Section 10.4.2 <table border="1"> <thead> <tr> <th>Gas Group</th> <th>Internal Ignition Source</th> <th>Enclosure Volume</th> <th>Which Zone</th> <th>Use CR-U Gland</th> </tr> </thead> <tbody> <tr> <td>I, IIC, IIB, IIA</td> <td>YES</td> <td>Any</td> <td>Zone 1 or 2</td> <td>YES</td> </tr> </tbody> </table> Other Equipment Mining Equipment Group I, M2 Ignitable Dust, Zones 21 and 22			Gas Group	Internal Ignition Source	Enclosure Volume	Which Zone	Use CR-U Gland	I, IIC, IIB, IIA	YES	Any	Zone 1 or 2	YES
Gas Group	Internal Ignition Source	Enclosure Volume	Which Zone	Use CR-U Gland									
I, IIC, IIB, IIA	YES	Any	Zone 1 or 2	YES									
INGRESS PROTECTION	IP66 & IP68 @ 100 metres Meets the requirements of DTS01 1991												
CURING TIME	@ 21°C Conductor termination can be effected after 1 hour The equipment can be energised after 4 hours The compound chamber can be inspected after 4 hours												
MATERIALS	Brass CZ121 (CR-UB) 316 Stainless Steel (CR-US) Inner LSOH compound Standard outer sheath seal is LSOH silicone, white (CR-U*) Entry thread seal: Red LSOH silicone												
VARIATIONS	For lead sheath cables the gland is fitted with a metallic continuity washer: Brass (CR-U2B); 316 Stainless Steel (CR-U2S)												
OPTIONS	THREADS	ISO Metric; NPT; NPS; ISO Pipe Thread (BSP Taper, BSP Parallel)											
	PLATING	Zinc (ZP); Nickel (NP); Tin (TP); Electroless Nickel (EN)											
OPERATING TEMPERATURES	-60°C to +85°C												





ACCESSORIES	Locknut - Brass (ACBLN); 316 Stainless Steel (ACSLN) Earth Tag - Brass (ACBET), 316 Stainless Steel (ACSET) IP Washer - Nylon (ACNSW); Red Fibre (ACFSW) Serrated Lock Washer - 316 Stainless Steel (ACSSW), Galvanised Steel (ACGSW) Shroud - PVC (ACSPVC) Gland and accessory kits: K1- includes gland, locknut, integral IP "O" ring & PVC shroud
EXAMPLE PART NUMBER	Sample: CR-UB K1/NP/20S/M20 CR-U: CR-U - Gland type **.B - Material (Brass) K1 - Supplied complete with accessories (PVC Shroud) NP - Nickel plating 20s - Gland size with regards to cable acceptance range M20 - Entry thread

Gland Size	Entry Threads		Entry Thread Length [B]	Max Across Corners [A]	Max Protrusion Length	Gland Seal Range					Shroud Size
	Metric	NPT/BSP				Cable Inner Sheath / Cores [C]			Cable Outer Sheath [D]		
						Max No. of Cores	Max Over Cores	Max Inner Sheath	Min	Max	
16	M20	1/2" or 3/4"	16	28.0	73.0	7	8.4	8.4	3.4	8.4	L24
20s	M20	1/2" or 3/4"	16	28.0	73.0	8	10.4	11.7	4.8	11.7	L24
20	M20	1/2" or 3/4"	16	33.0	73.0	14	12.5	14.0	9.5	14.0	EL30
25	M25	3/4" or 1"	16	41.4	74.0	25	17.8	20.0	11.7	20.0	EL38
32	M32	1" or 1 1/4"	16	50.6	80.0	50	23.5	26.3	18.1	26.3	EL46
40	M40	1 1/4" or 1 1/2"	16	60.5	87.0	80	28.8	32.2	22.6	32.2	EL55
50s	M50	2"	16	71.5	87.0	100	34.2	38.2	28.2	38.2	EL65
50	M50	2"	16	71.5	87.0	100	39.4	44.1	33.1	44.1	EL65
63s	M63	2 1/2"	19	88.0	88.0	120	44.8	50.1	39.3	50.1	EL80
63	M63	2 1/2"	19	88.0	88.0	120	50.0	56.0	46.7	56.0	EL80
75s	M75	3"	19	99.0	97.0	140	55.4	62.0	52.3	62.0	EL90
75	M75	3"	19	99.0	97.0	140	60.8	68.0	58.0	68.0	EL90
80	M80 x 2	3" or 3 1/2"	25	115.2	123.0	160	64.4	72.0	61.9	72.0	L104
85	M85 x 2	3" or 3 1/2"	25	115.2	123.0	180	69.8	78.0	69.1	78.0	L104
90	M90 x 2	3 1/2" or 4"	25	125.7	123.0	200	75.1	84.0	74.1	84.0	L114
100	M100 x 2	3 1/2" or 4"	25	125.7	123.0	220	80.5	90.0	81.8	90.0	L114

All Dimensions are in mm

NOTES:

- Gland Size does not necessarily equate to the entry thread size
- Integral entry thread seal option is not available for glands with tapered entry threads. IP washers can be supplied if required
- Please note that dimensions (A) & (B) may differ for glands with non-Metric entry threads. Please refer to our thread data tables for specific dimensions
- Unless otherwise stated ISO Metric entry threads have a 1.5mm pitch
- For Flameproof Exd applications the female thread into which the gland is to be fitted must comply with clause 5.3 of EN 50018:2000 (clause 5.3 IEC 79-1) and an engagement of at least 5 full threads must be achieved for parallel threads and should be achieved for tapered threads
- If CR-U type glands are fitted into non-metallic enclosures they must be included within the earth circuit of the system
- The user should seek expert advice if intending to combine flammable gases and combustible dusts in one environment/installation
- Full assembly instructions are supplied with glands, the instructions must be read prior to installation and adhered to in full

Supplied by:

A.S.P. Electro-Technology Ltd
Specialist Suppliers of Hazardous Area Certified
Electrical Products & Instrumentation

39 London Road, Hinckley, LE10 1HQ. U.K.
Tel: +44 (0)1455 635796 Fax: +44 (0)1455 251110
Email: sales@asp-electro-tech.com Web: www.asp-electro-tech.com



This publication is not intended to form the basis of a contract. All the above specifications, dimensions, weights, tolerances etc are typical and may be varied or changed by the manufacturer without prior notice. A.S.P. Electro-Technology accept no liability for consequence of use.